

	Final (daN)	P (bar)
VERDE / GREEN	13	45
AZUL / BLUE	25	90
ROJO / RED	38	135
AMARILLO / YELLOW	50	180

Dimensions		C mm	L mm	A mm	daN (20°C, 180 bar)
Z-50-7		7	56	49	50
Z-50-10		10	62	52	
Z-50-13		12,7	67,4	54,7	
Z-50-15		15	72	57	
Z-50-19		19	80	61	
Z-50-25		25	92	67	
Z-50-38		38	118	80	
Z-50-50		50	142	92	
Z-50-63		63,5	172	108,5	
Z-50-75		75	195	120	
Z-50-80		80	205	125	
Z-50-100		100	245	145	
Z-50-125		125	295	170	

Ordering example: 4 x Z-50-50 Amarillo / Yellow

Max. Recomend. 1,6m/s 40-100 strokes/min

10% min

N₂

~~Max. 180bar 2610psi Min. 25bar 362psi~~


Max. 80°C 176°F Min. 0°C 32°F

>80°C (176 °F) — Kit Viton

+1°C / +1,8°F +0.34%

Repair Kit

Irreparable

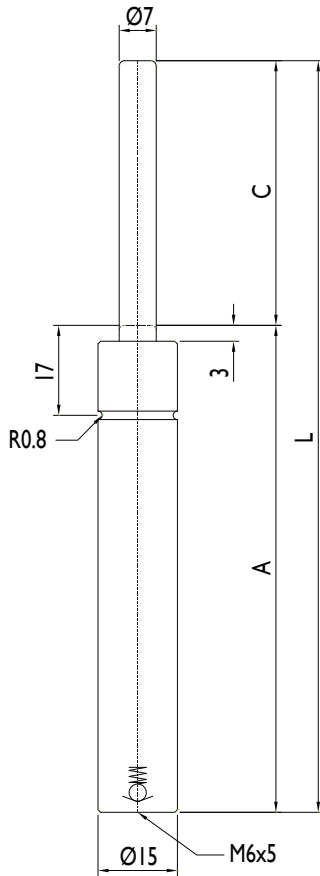

	Final (daN)	P (bar)
VERDE / GREEN	18	45
AZUL / BLUE	35	90
ROJO / RED	50	135
AMARILLO / YELLOW	70	180

Dimensions

	C mm	L mm	A mm	daN (20°C, 180 bar)
Z-70-7	7	56	49	70
Z-70-10	10	62	52	
Z-70-13	12,7	67,4	54,7	
Z-70-15	15	72	57	
Z-70-19	19	80	61	
Z-70-25	25	92	67	
Z-70-38	38,1	118,2	80,1	
Z-70-50	50	142	92	
Z-70-63	63,5	172	108,5	
Z-70-75	75	195	120	
Z-70-80	80	205	125	
Z-70-100	100	245	145	
Z-70-125	125	295	170	

Ordering example: 4 x Z-70-50 Amarillo / Yellow

Max. Recomend. 1,6m/s
 20°C / 68°F
 40-100 strokes/min

10% min

N₂

~~Max. 180bar / 2610psi
 Min. 25bar / 362psi~~

Max. 80°C / 176°F
 Min. 0°C / 32°F

>80°C (176 °F) — Kit Viton
 bar
 psi
 +1°C / +1,8°F +0.34%

Repair Kit

Irreparable